



+0.000  
-0.050 [1.27]  
Ø1.378 [35.0]

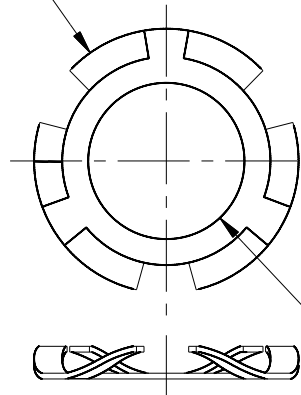


0.125 [3.18]  
FREE HEIGHT  
REFERENCE

±0.020 [0.51]  
Ø.814 [20.68]



1.378 [35]  
BEARING  
DIAMETER


0.062 [1.57]  
LOADED  
HEIGHT



SPRING FORCE

9.5 - 16.5 Lb 0.011 [0.28]  
42 - 73 N THICK MAT'L

16.0 - 26.0 Lb 0.014 [0.36]  
71 - 116 N THICK MAT'L

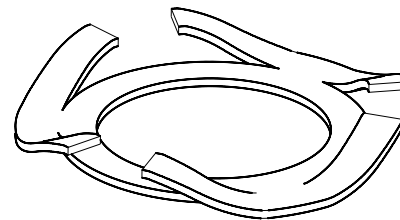

**M.D. Hubbard Spring Company**

Engineers and Manufacturers Since 1905  
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE:  
**1:1**

PROJECTION:

PRODUCT  
NAME: **FINGER SPRING WASHER - ENGLISH [MM]  
LOAD RATED**

PART No.: **FSW-1360**

DWG DATE:  
**JAN 1, 2026**

| MATERIAL          |                       | THICKNESS    | FINISH<br>Light Oil            |
|-------------------|-----------------------|--------------|--------------------------------|
| HIGH CARBON STEEL | ASTM A684/684M - 1074 | 0.011 [0.28] | FSW-1360-S-11<br>FSW-1360-S-14 |
|                   | AUSTEMPERED RC44-47   | 0.014 [0.36] |                                |